



B. TECHNICAL SPECIFICATIONS (DB400 / DB600 / DB900)


DB400



DB600

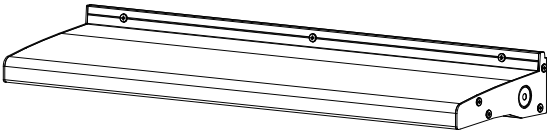


DB900

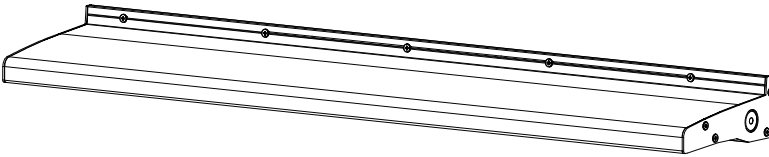


MODEL	DB400				DB600				DB900			
	B	B/27	W	W/27	B	B/27	W	W/27	B	B/27	W	W/27
MAIN POWER	BLACK		WHITE		BLACK		WHITE		BLACK		WHITE	
LIGHT COLOR	5000k	2700K	5000k	2700K	5000k	2700K	5000k	2700K	5000k	2700K	5000k	2700K
TOTAL LUMINOUS FLUX (LM)	1320 lm	1100 lm	1320 lm	1100 lm	1440lm	1200lm	1440lm	1200lm	2160lm	1800lm	2160lm	1800lm
BEAM ANGLE	20 DEGREES											
POWER CONSUMPTION (W)	11 W				12 W				18 W			
COLOR RENDERING INDEX (CRI)	> Ra80											
CURRENT (A)	100V:0.13/200V:0.06A				100V:0.14/200V:0.07A				100V:0.2/200V:0.1A			
INPUT VOLTAGE (V)	AC 100V-240V											
POWER FACTOR (PF)	> 0.9											
HEAT RESISTANCE	NORMAL MODE: 1 KV COMMON MODE: 2 KV											
LAMP WEIGHT	1.7 kg				2.3 kg				3.3 kg			
CABLE LENGTH	0.3 M											
INGRESS PROTECTION RATING (IP)	IP65 (WHEN WATERPROOFING IS PERFORMED ACCORDING TO THE INSTRUCTIONS IN THE MANUAL)											
IMPACT PROTECTION RATING	IK06											
OTHER CERTIFICATIONS AND TESTS	PSE (PRODUCT SAFETY ELECTRICAL APPLIANCE & MATERIAL LAW), IMPACT RESISTANCE TEST (IEC 60068-2-6)											
DESIGN LIFETIME	40,000 HOURS (AT AN AMBIENT TEMPERATURE OF 25°C)											
OPERATING TEMPERATURE	-25°C ~ 45°C											
WARRANTY PERIOD	3 YEARS											
MATERIAL	LAMP BODY: ALUMINUM, SIDE PANEL: ASA, LIGHT-EMITTING SURFACE: ACRYLIC, GASKET: SILICONE											
ACCESSORIES INCLUDED	GASKET ×1											

B. TECHNICAL SPECIFICATIONS (DB1200 / DB1800)

DB1200

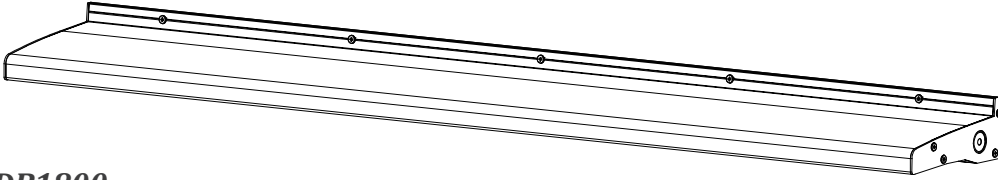

DB1800

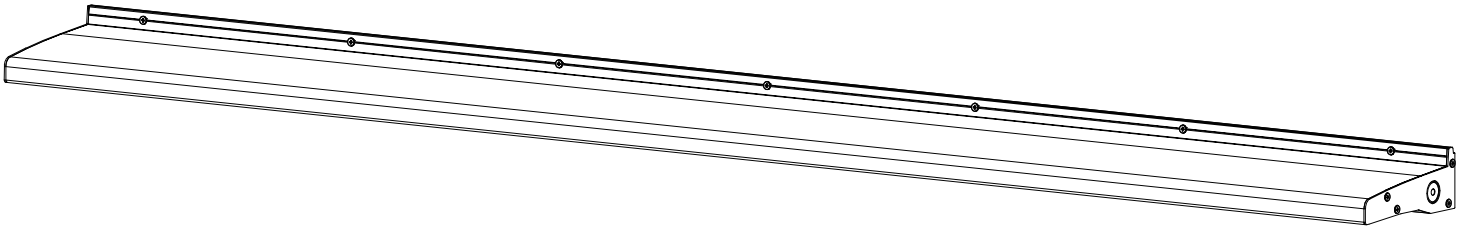


MODEL	DB1200				DB1800			
	B	B/27	W	W/27	B	B/27	W	W/27
MAIN POWER	BLACK		WHITE		BLACK		WHITE	
LIGHT COLOR	5000k	2700K	5000k	2700K	5000k	2700K	5000k	2700K
TOTAL LUMINOUS FLUX (LM)	2880lm	2400lm	2880lm	2400lm	4320lm	3600lm	4320lm	3600lm
BEAM ANGLE	20DEGREES							
POWER CONSUMPTION (W)	24W				36W			
COLOR RENDERING INDEX (CRI)	>Ra80							
CURRENT (A)	100V:0.28/200V:0.14A				100V:0.42/200V:0.21A			
INPUT VOLTAGE (V)	AC 100V-240V							
POWER FACTOR (PF)	> 0.9							
HEAT RESISTANCE	NORMAL MODE: 1 KV COMMON MODE: 2 KV							
LAMP WEIGHT	4 kg				6 kg			
CABLE LENGTH	0.3M							
INGRESS PROTECTION RATING (IP)	IP65 (WHEN WATERPROOFING IS PERFORMED ACCORDING TO THE INSTRUCTIONS IN THE MANUAL)							
IMPACT PROTECTION RATING	IK06							
OTHER CERTIFICATIONS AND TESTS	PSE (PRODUCT SAFETY ELECTRICAL APPLIANCES AND MATERIALS LAW), IMPACT RESISTANCE TEST (IEC 60068-2-6)							
DESIGN LIFETIME	40,000 HOURS (AT AN AMBIENT TEMPERATURE OF 25°C)							
OPERATING TEMPERATURE	-25°C ~ 45°C							
WARRANTY PERIOD	3 YEARS							
MATERIAL	LAMP BODY: ALUMINUM, SIDE PANEL: ASA, LIGHT-EMITTING SURFACE: ACRYLIC, GASKET: SILICONE							
ACCESSORIES INCLUDED	GASKET ×1							

4. DIMENSIONAL DRAWING


※ 16×12 = WALL MOUNTING HOLE FOR M10 BOLTS
 ※ Φ8 = WALL MOUNTING HOLE FOR WOOD SCREWS

DB400


TOP VIEW




FRONT VIEW




REAR VIEW

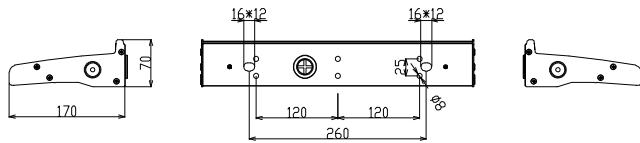

BOTTOM VIEW




TOP VIEW

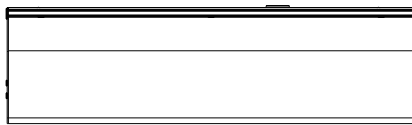


DB600


FRONT VIEW




REAR VIEW

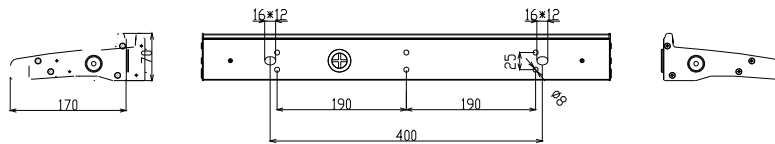

BOTTOM VIEW

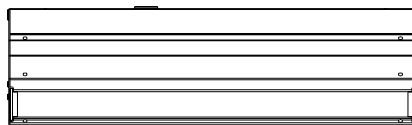


TOP VIEW

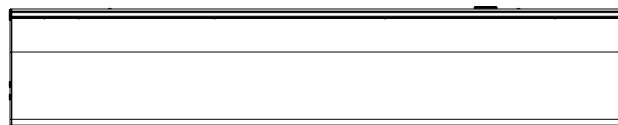


DB900


FRONT VIEW



REAR VIEW

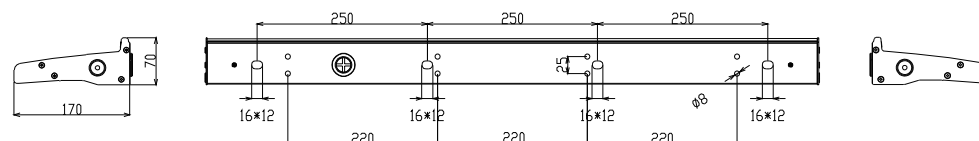


BOTTOM VIEW

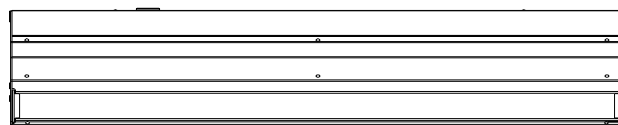


※ 16×12 = WALL MOUNTING HOLE FOR M10 BOLTS
 ※ Ø8 = WALL MOUNTING HOLE FOR WOOD SCREWS

4. DIMENSIONAL DRAWING


TOP VIEW

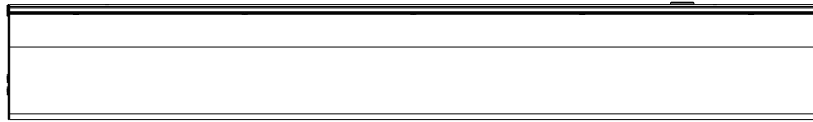


FRONT VIEW




REAR VIEW

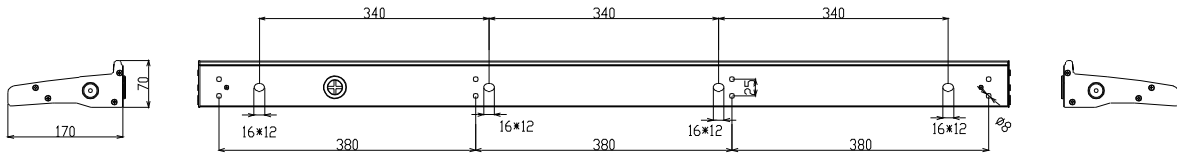


BOTTOM VIEW

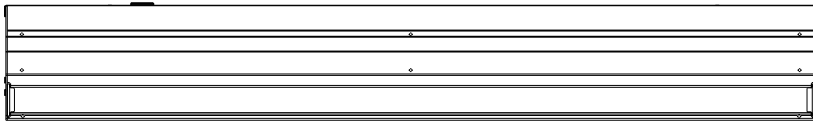


TOP VIEW

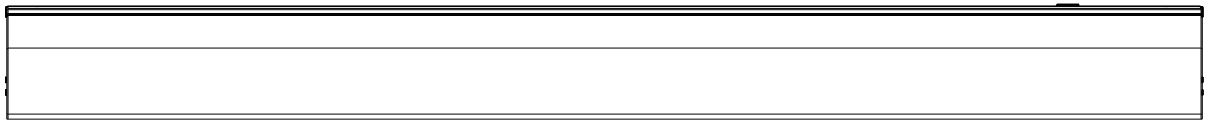


FRONT VIEW




REAR VIEW

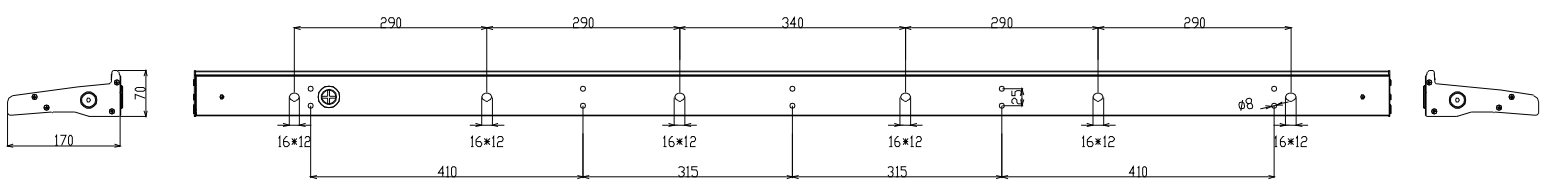

BOTTOM VIEW



5. PART NAMES OF COMPONENTS

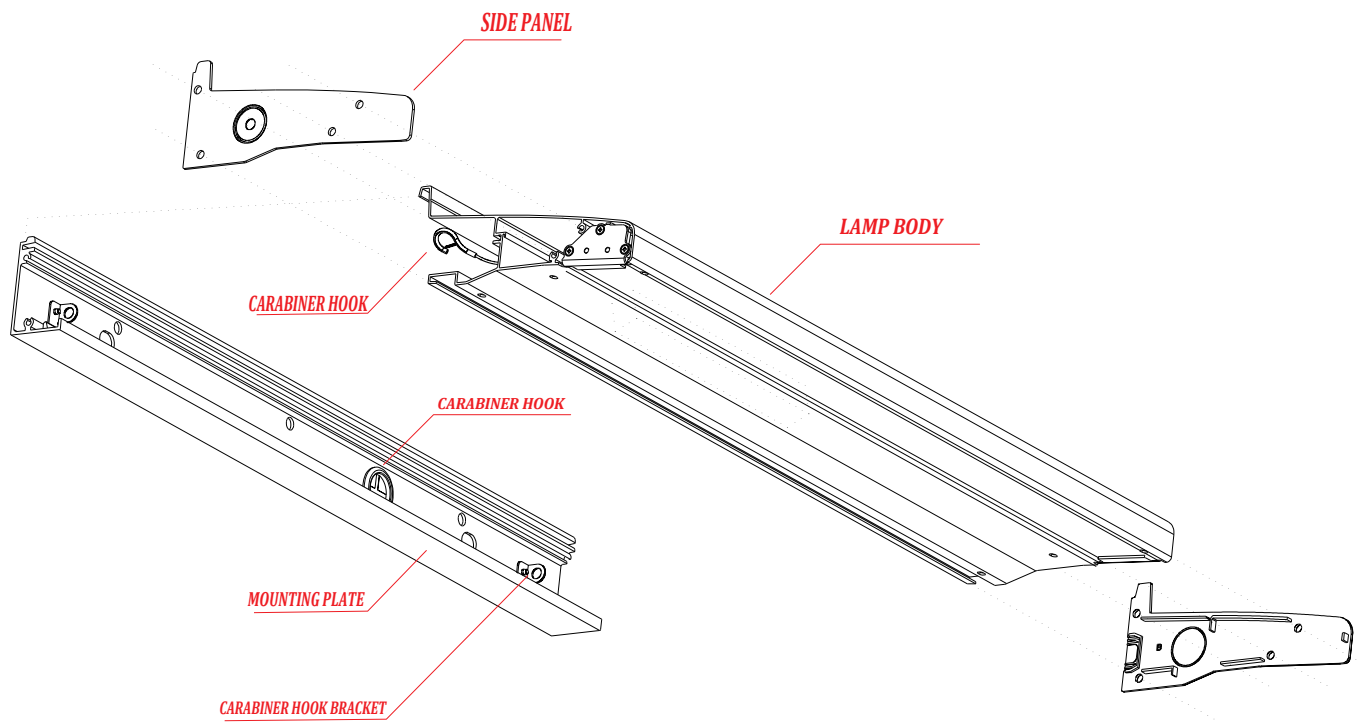

OTHER ACCESSORIES INCLUDED (NOT SHOWN IN THE ABOVE ILLUSTRATION)

	M4 SCREWS (QUANTITY USED)	M4 SCREWS (QUANTITY USED)	RUBBER GASKET	ONLINE USER GUIDE (WEB) QR CODE PRINTING PAPER
DB400	11 LAMPS	17 LAMPS	1 PIECE	1 PIECE
DB600	11 LAMPS			
DB900	13 LAMPS			
DB1200	13 LAMPS			
DB1800	15 LAMPS			